

→ Series 420



■ MATERIAL



■ SPECIFICATION



1/4" – 3/8"



– 40°C to + 260°C  
depending on version



0,5 – 50 bar  
depending on version

■ SUITABLE FOR

|                        |                         |  |
|------------------------|-------------------------|--|
| Liquids                | neutral and non-neutral |  |
| Air, gases and vapours | neutral and non-neutral |  |
| Steam                  |                         |  |

■ EXAMPLES OF USE

For the protection of:

- pressure tanks and -systems for neutral / non-neutral vapours, gases and liquids
- steam boilers and steam plants

Please observe plant-specific regulations and use of appropriate valve version and sealing material.

- chemical plants, biogas plants
- process technology
- desalination plants
- process equipment construction and medical technology
- shipbuilding industry and marine equipment
- secondary areas in the food-, beverage-, pharmaceutical- and cosmetics-industries
- offshore-applications
- general applications with screwed pipe connections

**Safety valves are set and sealed at the factory.**

■ APPROVALS

|  |                                      |
|--|--------------------------------------|
| TÜV-Type test approval 2069            | D/G, F, F/K/S <sup>1</sup>           |
| EC type examination                    | S/G, L, F/K/S <sup>1</sup>           |
| TR ZU 032/2013 - TR ZU 010/2011        | D/G (S/G), F (L), F/K/S <sup>1</sup> |
| <b>Requirements</b>                    |                                      |
| AD 2000 Data sheet A2                  | DIN EN ISO 4126-1                    |
| TRD 421                                | PED 2014/68/EU                       |
| TRB 801 No. 22 and No. 23 <sup>1</sup> |                                      |

**Classification society**

|                                       |         |
|---------------------------------------|---------|
| Germanischer Lloyd                    | GL      |
| Lloyd's Register EMEA                 | LR EMEA |
| American Bureau of Shipping           | ABS     |
| Det Norske Veritas                    | DNV     |
| Bureau Veritas                        | BV      |
| Russian Maritime Register of Shipping | RS      |

■ MATERIALS

| Component                   | Material        | DIN EN | ASME   |
|-----------------------------|-----------------|--------|--------|
| Inlet body                  | Stainless steel | 1.4404 | 316 L  |
| Outlet body                 | Stainless steel | 1.4404 | 316 L  |
| Internal parts              | Stainless steel | 1.4404 | 316 L  |
| Spring                      | Stainless steel | 1.4310 | 302    |
| Metallic bellows (optional) | Stainless steel | 1.4571 | 316 Ti |
| PTFE-bellows (optional)     | PTFE            | PTFE   | PTFE   |

<sup>1</sup>only for versions with bellows

|           |                                    |   |
|-----------|------------------------------------|---|
| <b>t</b>  | gastight version of spring housing | for neutral and non-neutral media without counter pressure.<br>The environment is protected from being affected by the medium.  |
| <b>tb</b> | gastight version with bellows      | for neutral and non-neutral media. spring and moving parts as the environment are protected from being affected by the medium.<br>Version of bellows depend on set pressure:<br><b>DN8:</b><br>0,5 to 9 bar PTFE bellows;<br>9,1 to 50 bar stainless steel bellows<br><b>DN10:</b><br>0,5 to 7 bar PTFE bellows;<br>7,1 to 50 bar stainless steel bellows |

## ■ MEDIUM

|           |                    |   |
|-----------|--------------------|---|
| <b>GF</b> | gaseous and liquid | Air, vapours, gases, liquids and - depending on seal - also for steam<br>Only for steam boilers <10l and d <sub>0</sub> minimum 6mm, i.e. only DN10 usable. |
|-----------|--------------------|---|

## ■ TYPE OF LIFTING MECHANISM

|          |                        |
|----------|------------------------|
| <b>L</b> | Lifting lever          |
| <b>0</b> | without lifting device |

## ■ AVAILABLE NOMINAL DIAMETERS AND CONNECTION SIZES

| Nominal diameter DN |           | 8        |          |           | 10        |           |           |
|---------------------|-----------|----------|----------|-----------|-----------|-----------|-----------|
| Inlet               |           | 1/4" (8) | SV (8mm) | SV (10mm) | 3/8" (10) | SV (10mm) | SV (12mm) |
| Outlet              | 3/8" (10) | ■        | ■        | ■         | ■         | ■         | ■         |
|                     | SV (12mm) | ■        | ■        | ■         | ■         | ■         | ■         |

## ■ TYPE OF CONNECTION INLET / OUTLET THREADED CONNECTIONS

|                          |          |  |                                     |
|--------------------------|----------|--|-------------------------------------|
| <b>m / f</b>             | Standard | Male thread BSP-P / Female thread BSP-P                                | DIN EN ISO 228-1 / DIN EN ISO 228-1 |
| <b>Against surcharge</b> |          |  |                                     |
| <b>SV / f</b>            |          | Cutting ring threaded connection / female thread BSP-P                 | EN ISO 8434-1 / DIN EN ISO 228-1    |
| <b>SV / SV</b>           |          | Cutting ring threaded connection /<br>Cutting ring threaded connection | EN ISO 8434-1 / EN ISO 8434-1       |

## ■ SEALS


|                          |                          |   |                 |
|--------------------------|--------------------------|---|-----------------|
| <b>EPDM</b>              | Ethylene propylene diene | Elastomere moulded seal with metallic support | -40°C to +170°C |
| <b>FKM</b>               | Fluorcarbon              | Elastomere moulded seal with metallic support | -20°C to +200°C |
| <b>Against surcharge</b> |                          |   |                 |
| <b>FFKM</b>              | Perfluorinated rubber    | Elastomere moulded seal with metallic support | -10°C to +260°C |

■ NOMINAL DIAMETERS, CONNECTIONS, INSTALLATION DIMENSIONS

| Series 420: Connection, installation dimensions, ranges of adjustment |      |              |              |
|---|------|--------------|--------------|
| Nominal diameter  | DN   | 8            | 10           |
| Connection DIN EN ISO 228   | G    | 1/4" (8)     | 3/8" (10)    |
| Outlet DIN EN ISO 228   | G1   | 3/8" (10)    | 3/8" (10)    |
| Installation dimensions in mm   | L    | 25           | 25           |
|   | Lmax | 45           | 45           |
|   | H    | 75           | 75           |
|   | H1   | 87           | 87           |
|   | Hmax | 93           | 93           |
|   | h    | 32           | 32           |
|   | h1   | 12           | 12           |
|   | SW   | 20           | 20           |
| Weight  | do   | 4,5          | 6            |
|   | kg   | 0,31 / 0,36* | 0,23 / 0,28* |
| Range of adjustment   | bar  | 0,5-50       | 0,5-50       |

\* Weight indications for valve with lever

■ MAIN DIMENSIONS, INSTALLATION DIMENSIONS

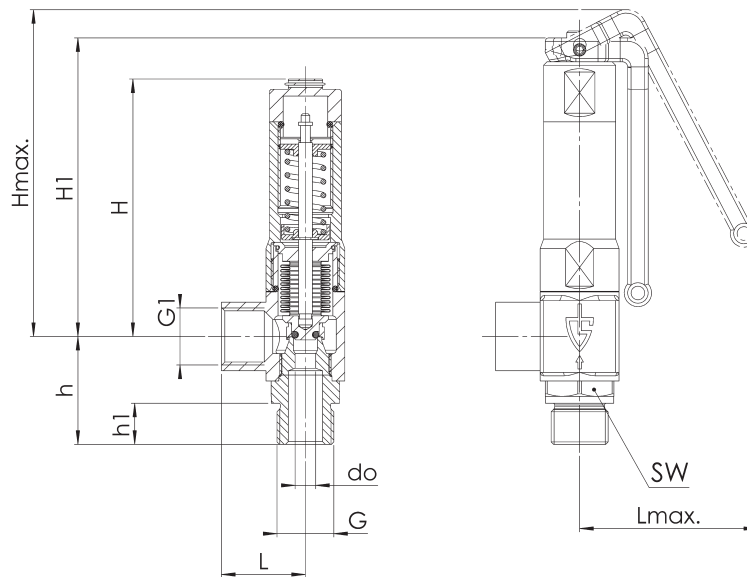

■ INDIVIDUAL SELECTION / VALVE CONFIGURATION

| Series | Valve version | Medium | Lifting device | Nominal diameter DN | Connection type |        | Connection size |        | Seal | Options | Set pressure | Quantity |
|--------|---------------|--------|----------------|---------------------|-----------------|--------|-----------------|--------|------|---------|--------------|----------|
|        |               |        |                |                     | Inlet           | Outlet | Inlet           | Outlet |      |         |              |          |
| 420    | tb            | GF     | L              | 8                   | m               | f      | 8               | 10     | FFKM |         | 5,5          | 2        |
| 420    | t             | GF     | O              | 10                  | SV              | f      | 10mm            | 10     | EPDM |         | 22           | 1        |
| 420    |               | GF     |                |                     |                 |        |                 |        |      |         |              |          |
| 420    |               | GF     |                |                     |                 |        |                 |        |      |         |              |          |

In this table you can configure a valve according to your individual requirements (similar to the *example* shown, which should be deleted before you enter your own data). Please complete the table by hand using the abbreviations in this datasheet and then fax it to: +49(0)7141.4889488  
Please do not forget to add your personal data so that our sales team can contact you.

Name \_\_\_\_\_

First Name \_\_\_\_\_

Company \_\_\_\_\_

Telephone \_\_\_\_\_

E-Mail \_\_\_\_\_

■ CAPACITY TABLE

| Series 420: Blowing-off rates at 10% above set pressure |     |     |    |      |     |     |      |
|---|-----|-----|----|------|-----|-----|------|
| Nominal diameter DN                                     |     | 8   |    |      | 10  |     |      |
| Set pressure bar  |     | I   | II | III  | I   | II  | III  |
| Air I   | 0,5 | 11  | -  | 0,35 | 16  | 13  | 0,65 |
|   | 1   | 15  | -  | 0,48 | 24  | 19  | 0,88 |
|   | 1,5 | 20  | -  | 0,58 | 32  | 25  | 1,07 |
| Nm <sup>3</sup> /h                                      | 2   | 24  | -  | 0,67 | 40  | 32  | 1,24 |
|   | 2,5 | 28  | -  | 0,75 | 47  | 37  | 1,38 |
|   | 3   | 33  | -  | 0,82 | 55  | 43  | 1,52 |
| Steam II  | 3,5 | 37  | -  | 0,89 | 62  | 48  | 1,64 |
|   | 4   | 41  | -  | 0,95 | 69  | 53  | 1,75 |
|   | 4,5 | 45  | -  | 1,01 | 76  | 58  | 1,86 |
| Water III   | 5   | 49  | -  | 1,06 | 83  | 64  | 1,96 |
|   | 5,5 | 53  | -  | 1,12 | 90  | 69  | 2,05 |
|   | 6   | 58  | -  | 1,16 | 96  | 74  | 2,14 |
| m <sup>3</sup> /h                                       | 6,5 | 62  | -  | 1,21 | 103 | 79  | 2,23 |
|   | 7   | 66  | -  | 1,26 | 110 | 85  | 2,32 |
|   | 7,5 | 70  | -  | 1,30 | 117 | 90  | 2,40 |
|   | 8   | 74  | -  | 1,35 | 124 | 95  | 2,48 |
|   | 8,5 | 78  | -  | 1,39 | 131 | 100 | 2,55 |
|   | 9   | 83  | -  | 1,43 | 138 | 105 | 2,63 |
|   | 9,5 | 87  | -  | 1,47 | 145 | 111 | 2,70 |
|   | 10  | 91  | -  | 1,50 | 152 | 116 | 2,77 |
|   | 11  | 99  | -  | 1,58 | 166 | 126 | 2,90 |
|   | 12  | 108 | -  | 1,65 | 180 | 136 | 3,03 |
|   | 13  | 116 | -  | 1,71 | 194 | 147 | 3,16 |
|   | 14  | 124 | -  | 1,78 | 208 | 157 | 3,28 |
|   | 15  | 133 | -  | 1,84 | 222 | 167 | 3,39 |
|   | 16  | 141 | -  | 1,90 | 236 | 178 | 3,50 |
|   | 17  | 149 | -  | 1,96 | 250 | 188 | 3,61 |
|   | 18  | 158 | -  | 2,02 | 264 | 198 | 3,71 |
|   | 19  | 166 | -  | 2,07 | 278 | 208 | 3,82 |
|   | 20  | 174 | -  | 2,13 | 292 | 218 | 3,92 |
|   | 21  | 183 | -  | 2,18 | 306 | 229 | 4,01 |
|   | 22  | 191 | -  | 2,23 | 320 | 239 | 4,11 |
|   | 23  | 199 | -  | 2,28 | 334 | 249 | 4,20 |
|   | 24  | 208 | -  | 2,33 | 348 | 260 | 4,29 |
|   | 25  | 216 | -  | 2,38 | 362 | 270 | 4,38 |
|   | 26  | 224 | -  | 2,43 | 376 | 280 | 4,46 |
|   | 27  | 233 | -  | 2,47 | 390 | 291 | 4,55 |
|   | 28  | 241 | -  | 2,52 | 404 | 301 | 4,63 |
|   | 29  | 249 | -  | 2,56 | 418 | 312 | 4,72 |
|   | 30  | 258 | -  | 2,60 | 432 | 321 | 4,80 |
|   | 32  | 274 | -  | 2,69 | 460 | 342 | 4,95 |
|   | 34  | 291 | -  | 2,77 | 488 | 363 | 5,11 |
|   | 36  | 308 | -  | 2,85 | 515 | 384 | 5,25 |
|   | 38  | 324 | -  | 2,93 | 543 | 404 | 5,40 |
|   | 40  | 341 | -  | 3,01 | 571 | 425 | 5,54 |
|   | 42  | 358 | -  | 3,08 | 599 | 446 | 5,67 |
|   | 44  | 374 | -  | 3,15 | 627 | 467 | 5,81 |
|   | 46  | 391 | -  | 3,23 | 655 | 488 | 5,94 |
|   | 48  | 408 | -  | 3,30 | 683 | 509 | 6,07 |
|   | 50  | 424 | -  | 3,36 | 711 | 530 | 6,19 |